

**VALVOLA A FLUSSO AVVIATO PN16**



**GLOBE VALVE ON-OFF TYPE PN16**

**APPLICAZIONE:**

Installazioni acqua e vapore.

**APPLICATION:**

Suitable for water and steam.

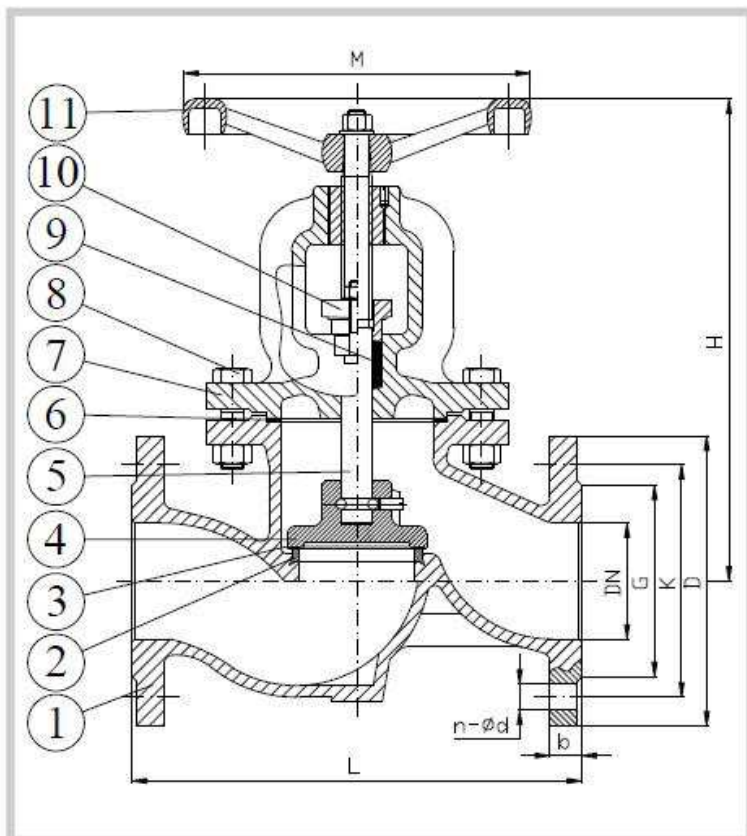

<b>NORMA PROGETTO:</b>	EN 1074-1
<b>SCARTAMENTO:</b>	EN 558 Serie 1
<b>FLANGE:</b>	EN 1092-2
<b>COLLAUDI:</b>	EN 12266-1
<b>PRESS. ESERCIZIO:</b>	16bar ≤ +120°C, 11bar ≤ +160°C, 9bar ≤ +200°C
<b>DESIGN STANDARD:</b>	EN 1074-1
<b>FACE TO FACE:</b>	EN 558 Serie 1
<b>FLANGES:</b>	EN 1092-2
<b>TESTS:</b>	EN 12266-1
<b>WORKING PRESS.:</b>	16bar ≤ +120°C, 11bar ≤ +160°C, 9bar ≤ +200°C

PART	DENOMINAZIONE MATERIALI	MATERIALS
1 <b>CORPO</b> <b>BODY</b>	EN-GJL 250	EN-GJL 250
2 <b>TENUTA CORPO</b> <b>BODY SEAL RING</b>	ACCIAIO INOX	STAINLESS STEEL
3 <b>TENUTA DISCO</b> <b>DISC SEAL RING</b>	ACCIAIO INOX	STAINLESS STEEL
4 <b>OTTURATORE</b> <b>OBTURATOR</b>	EN-GJL 250	EN-GJL 250
5 <b>ASSE</b> <b>STEM</b>	ACC. INOX AISI420 (EN 1.4021)	SS AISI420 (EN 1.4021)
6 <b>GUARNIZIONE</b> <b>GASKET</b>	GRAFITE	GRAPHITE
7 <b>CAPPELLO</b> <b>BONNET</b>	EN-GJL 250	EN-GJL 250
8 <b>VITE E DADO</b> <b>BOLT &amp; NUT</b>	ACCIAIO ZINCATO	GALVANIZED STEEL
9 <b>GUARNIZIONE</b> <b>GASKET</b>	GRAFITE	GRAPHITE
10 <b>PREMISTOPPA</b> <b>PACKING GLAND</b>	EN-GJL 250	EN-GJL 250
11 <b>VOLANTINO</b> <b>HANDWHEEL</b>	EN-GJL 250	EN-GJL 250

DN	D	K	G	b	n-ød	L	H	M	W(kg)
15	95	65	47	14	4-14	130	160	80	3.4
20	105	75	58	16	4-14	150	165	80	3.8
25	115	85	68	16	4-14	160	190	100	5.1
32	140	100	78	18	4-18	180	210	120	8
40	150	110	88	18	4-18	200	220	140	9.4
50	165	125	102	20	4-18	230	235	140	11.4
65	185	145	122	20	4-18	290	275	160	18
80	200	160	138	22	8-18	310	335	240	30.7
100	220	180	158	24	8-18	350	375	240	40
125	250	210	188	26	8-18	400	425	280	62
150	285	240	212	26	8-22	480	490	320	91
200	340	295	268	30	12-22	600	620	360	153
250	405	355	320	32	12-28	730	705	400	210

**COLORE:** Grigio RAL 7015.

**COLOUR:** Grey RAL 7015.